



PVC SYSTEMS

Rehau Synego

Fullest benefits at a reasonable price.



Profile thickness

80 mm

U_w from
0,71 (W/m²K)



R_w to 47 dB



Warranty



ENERGY-SAVING:

- SYNEGO profile thickness is 80 mm
- 7 chambers in the frame, 6 chambers in the sash – for high thermal performance
- SYNEGO provides up to 50% better thermal insulation in comparison to current window standards
- low 117 mm casing
- 3-seals system

SAFETY:


- glazing space up to 51 mm - for triple glazing, safety and burglary protection glass
- option to apply individual burglary protection solutions

COMFORT:

- special, smooth HDF (High Definition Finishing) external profiles surface

Gealan S9000

Warm, modern standard.

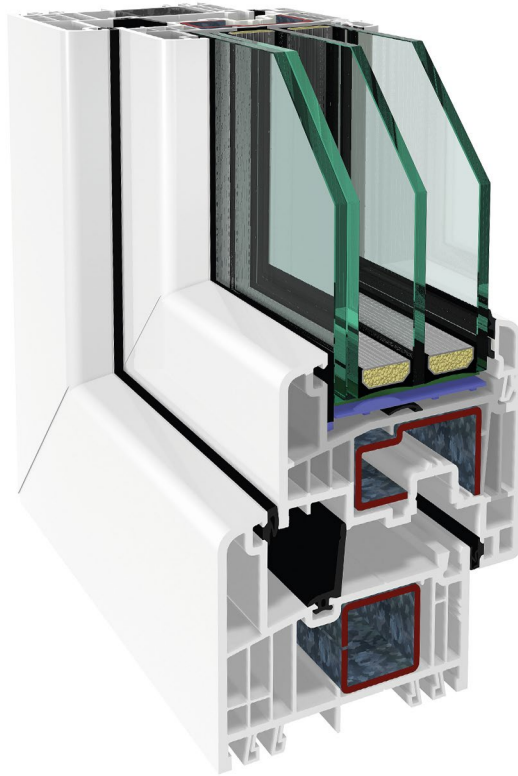

Profile thickness

82^{*}_{mm}

U_w from
0,8 (W/m²K)



R_w to 46 dB



Warranty



ENERGY-SAVING:

- *profile depth is exactly 82.5 mm
- 3-seals system
- 6-chamber profiles
- heat transfer coefficient U_f = 0.91 W/m²K (MD version)

SAFETY:

- glazing space up to 52 mm - for triple glazing, safety and burglary protection glass

COMFORT:

- greater window acoustic resistance - R_w up to 47dB
- smooth profile surface resistant to weathering thanks to GEALAN-acrylcolor® technology



NEXBAU Sp. z o.o.



Karpicko, ul. Poznańska 9, 64-200 Wolsztyn
tel. +48 68 347 02 00, fax +48 68 347 02 03



info@nexbau.com



www.nexbau.com